

Compact filter

Airpac ePM1 65%

APPLICATIONS


- Fine filtration in air handling units with pre-filtration
- Pre-filter for Cleanroom application

ADVANTAGES

- Compact and lightweight
- Large filter surface for a long service life
- High filter efficiency
- Eurovent certified through the manufacturer

SPECIFICATIONS

- Media: Minipleat fiberglass paper, Frame: Polystyrene plastic or galvanized steel
- Seal: Polyurethane, Spacers: Hot-melt cord, Flange thickness: 25 mm.
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

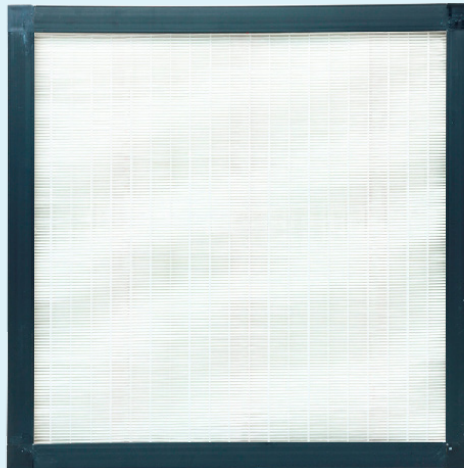

| ARTICLE NUMBER | WIDTH MM. | LENGTH MM. | THICKNESS MM. | INCH SIZE | ISO 16890 | EN 779 | FLOW RATE M3/H | INITIAL RESISTANCE | ENERGY USAGE |
|----------------|-----------|------------|---------------|-----------|-----------|--------|----------------|--------------------|--------------|
| | 287 | 287 | 100 | | ePM1 65% | F7 | 846 | 150 | |
| | 287 | 592 | 100 | | ePM1 65% | F7 | 1745 | 150 | |
| | 490 | 592 | 100 | | ePM1 65% | F7 | 2980 | 150 | |
| | 592 | 592 | 100 | | ePM1 65% | F7 | 3600 | 150 | |

Alternative sizes on request