

# Compact filter

## Airpac ePM10 65%

### APPLICATIONS


- Medium filtration for air handling units and prefiltration for (H)EPA filters
- Pre-filter for Cleanroom application

### ADVANTAGES

- Compact and lightweight
- Large filter surface for a long service life
- High filter efficiency
- Eurovent certified through the manufacturer

### SPECIFICATIONS

- Media: Minipleat fiberglass paper, Frame: Polystyrene plastic or galvanized steel
- Seal: Polyurethane, Spacers: Hot-melt cord, Flange thickness: 25 mm.
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

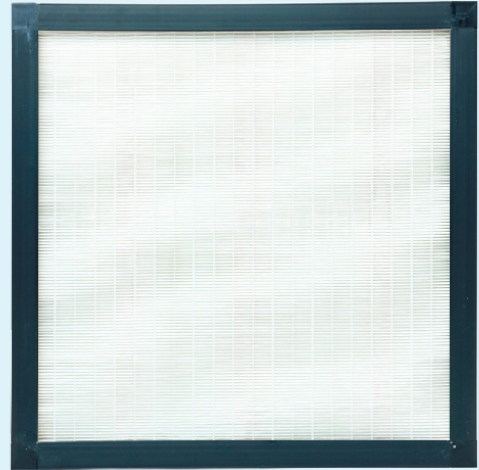

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	INCH SIZE	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	100		ePM10 65%	M5	846	130	
	287	592	100		ePM10 65%	M5	1745	130	
	490	592	100		ePM10 65%	M5	2980	130	
	592	592	100		ePM10 65%	M5	3600	130	

Alternative sizes on request