

Compact filter V-Cel Activated carbon ePM10 50%

APPLICATIONS


- Coarse (pre)filtration for air handling units
- Capture of odors and gases
- For airports, offices etc

ADVANTAGES

- Self-supporting construction
- Easy to install and replace
- Large filter surface for a long service life
- No loss of activated carbon grit

SPECIFICATIONS

- Media: Activated carbon granulate between synthetic fleece
- Frame: Polystyrene
- Maximum continuous temperature: 50° Celsius
- Maximum relative humidity: 70%

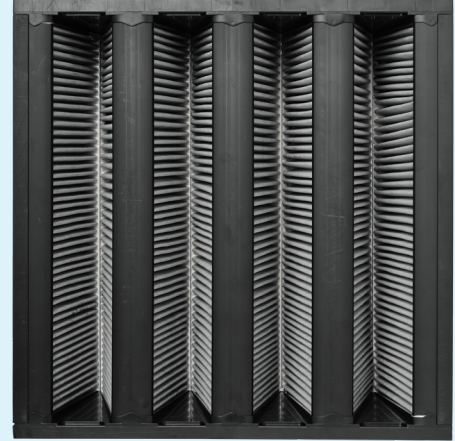

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	INCH SIZE	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	592	292		ePM10 50%	G4			
	490	592	292		ePM10 50%	G4			
	592	592	292		ePM10 50%	G4			

Alternative sizes on request