

# Filter media

## Activated carbon 5135

### APPLICATIONS


- Capture of odors and gases
- Fine filtration for air handling units and prefiltration for (H) EPA filters
- Used in air conditioning and ventilation technology, consumer goods and electronic appliances

### ADVANTAGES

- Partly foldable
- Available on roll and as custom size
- Impregnated Specialty Gas Absorption Options
- Different pressure differences based on fiber blends and compression
- Most economically priced activated carbon medium

### SPECIFICATIONS

- Media: Filter media coated with activated carbon powder
- Activated carbon content: ~ 300 gr/m<sup>2</sup>
- Basis weight: 650 ± 70 gr/m<sup>2</sup>

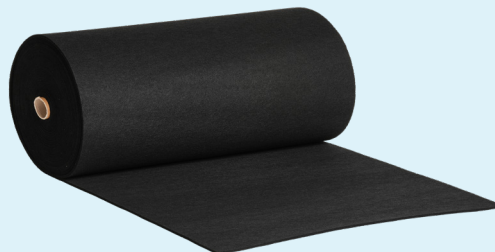

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	FIRE CLASS	ISO 16890	ACTIVATED CARBON LEVEL	FLOW RATE M3/H	INITIAL RESISTANCE	TYPE
04030020	1000	20000	12			300 (gr/m2)			5135

Alternative sizes on request