

Filter media

PPI

APPLICATIONS


- Homogeneous open cell structure for the capture of coarse dirt particles
- Pre-filtration or as an air filter where air quality requirements are lower

ADVANTAGES

- Available in various thicknesses and cell sizes
- Higher PPI (Pore Per Inch) value = denser structure
- Depending on application and mounting, flexible or rigid foam self-supporting fabric
- Can be cleaned to a limited extent and resistant to water, fuel, detergents, mineral oil and greases

SPECIFICATIONS

- Material: black foamed polyester - flexible media or rigid foam self-supporting media
- Maximum relative humidity: 100%

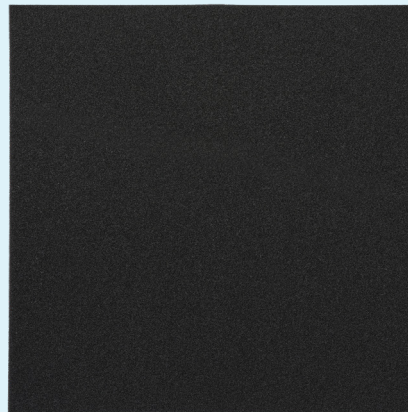

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	FIRE CLASS	ISO 16890	CELL SIZE PPI	FLOW RATE M3/H	INITIAL RESISTANCE	TYPE
	1500	2000	5 - 200			3800 - 5200			PPI 10
	1500	2000	5 - 200			2300 - 3300			PPI 20
	1500	2000	5 - 200			1650 - 2150			PPI 30
	1500	2000	5 - 200			1080 - 1580			PPI 45

Alternative sizes on request