

# V-belts

## APPLICATIONS


- Drive belt for machines
- The belt runs over two pulleys with the same V-shape, which determines the profile

## ADVANTAGES

- The pulleys pull the V-belt tight, preventing slippage and resulting in considerable transmission power.

## SPECIFICATIONS

- Classic design: constructed from drawstrings, covered with a textile chip-rubber mixture and wrapped with textile tape. and vulcanized to DIN standard length
- Open flank: produced on a mold with a rubber layer, tensile cords, again a rubber layer and a textile layer. Then vulcanized and cut to the right angle and width.
- Narrow profile: higher profile and can transmit greater power; less V-belts needed; drive compact and lighter. Available in toothed and non-serrated version

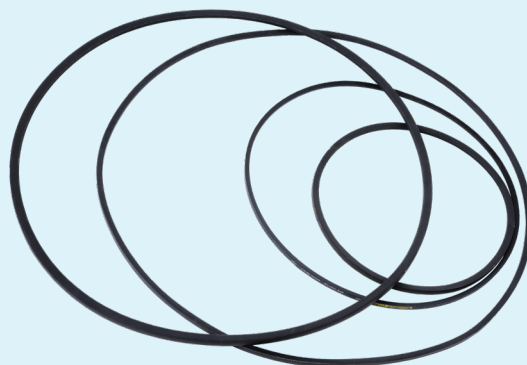

DESCRIPTION	TYPE	WIDTH MM.	HEIGHT MM.	LW RANGE MM.	LI RANGE MM.
V-BELT	5	5	3	200 - 610	190 - 600
V-BELT	8	8	5	335 - 1270	315 - 1250
V-BELT	20	20	12,5	950 - 4550	900 - 4500
V-BELT	25	25	16	1460 - 9060	1400 - 9000
V-BELT	3V	9	8	631 - 2993	593 - 2955
V-BELT	3VX	9	8	631 - 3552	593 - 3514
V-BELT	5V	15	13	1411 - 5374	1351 - 5314
V-BELT	5VX	15	13	1792 - 4307	1732 - 4247
V-BELT	8V	25	23	2845 (LA) - 11430 (LA)	2725 - 11310
V-BELT	A/13	13	8	437 - 5030	407 - 5000
V-BELT	AVX	13	10	1132 - 1380	1087 - 1350
V-BELT	AX/X13	13	8	605 - 3380	575 - 3350
V-BELT	B/17	17	11	610 - 7140	570 - 7100
V-BELT	BX/X17	17	11	610 - 2656	570 - 2616
V-BELT	C/22	22	14	1148 - 8058	1090 - 8000
V-BELT	CX/X22	22	14	1378 - 2058	1320 - 2000
V-BELT	D/32	32	20	2075 - 9075	2000 - 9000
V-BELT	E/40	40	25	3080 - 9080	3000 - 9000

Alternative sizes on request

DESCRIPTION	TYPE	WIDTH MM.	HEIGHT MM.	LW RANGE MM.	LI RANGE MM.	
V-BELT	SPA	12.7	10	732 - 4500	687 - 4455	
V-BELT	SPB	16.3	13	1250 - 8000	1190 - 7940	
V-BELT	SPC	22	18	2000 - 9500	1917 - 9417	
V-BELT	SPZ	9.7	8	487 - 3150	449 - 3112	
V-BELT	XPA	12.7	10	707 - 3550	662 - 3505	
V-BELT	XPB	16.3	13	1250 - 5000	1190 - 4940	
V-BELT	XPC	22	18	2000 - 5000	1917 - 4917	
V-BELT	XPZ	9.7	8	587 - 3550	549 - 3512	
V-BELT	Y/6	6	4	295 - 865	280 - 850	
V-BELT	Z/10	10	6	312 - 2522	290 - 2500	

Alternative sizes on request