

# Absolute filter Pak H14

## APPLICATIONS


- Cleanroom supply and exhaust air
- Inline and Terminal Enclosures
- Pharmaceutical manufacturing, laboratories, semiconductor/microelectronics manufacturing and healthcare

## ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Low pressure drop
- Two-component polyurethane molded or flat neoprene gasket for a perfect seal

## SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded anodized aluminum, waterproof MDF or galvanized steel
- Spacers: Thermoplastic hot melt
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

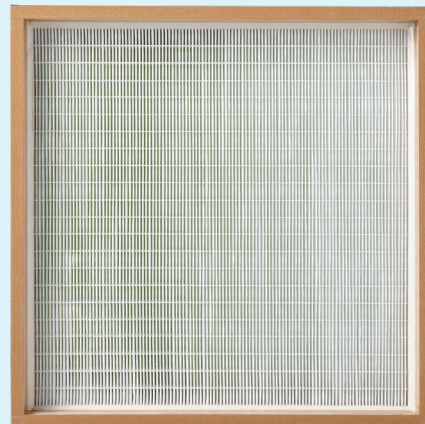

| ARTICLE NUMBER | WIDTH MM. | LENGTH MM. | THICKNESS MM. | THICKNESS PLEAT PACK MM. | EN 1822 | ISO 29463 | FLOW RATE M3/H | INITIAL RESISTANCE | EFFICIENCY |
|----------------|-----------|------------|---------------|--------------------------|---------|-----------|----------------|--------------------|------------|
|                | 305       | 305        | 78            |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |
|                | 305       | 610        | 78            |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |
|                | 610       | 610        | 78            |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |
|                | 305       | 305        | 150           |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |
|                | 305       | 610        | 150           |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |
|                | 610       | 610        | 150           |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |
|                | 305       | 305        | 292           |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |
|                | 305       | 610        | 292           |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |
|                | 610       | 610        | 292           |                          | H14     | ISO 45 H  |                |                    | 99,99500%  |

Alternative sizes on request