

Absolute filter

Dry seal H14

APPLICATIONS


- Cleanroom supply and exhaust air
- Open plenum, terminal and in-line enclosure systems and clean benches

ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

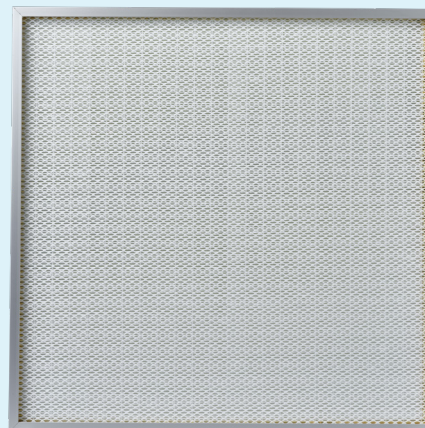

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	305	305	70	50	H14	ISO 45 H	150	125	99,99500%
	305	305	94	74	H14	ISO 45 H	150	95	99,99500%
	305	305	118	98	H14	ISO 45 H	150	80	99,99500%
	305	610	70	50	H14	ISO 45 H	300	125	99,99500%
	305	610	94	74	H14	ISO 45 H	300	95	99,99500%
	305	762	70	50	H14	ISO 45 H	380	125	99,99500%
	305	915	70	50	H14	ISO 45 H	450	125	99,99500%
	457	457	70	50	H14	ISO 45 H	340	125	99,99500%
	457	457	118	98	H14	ISO 45 H	340	80	99,99500%
	457	610	70	50	H14	ISO 45 H	450	125	99,99500%
	610	610	70	50	H14	ISO 45 H	600	125	99,99500%
	610	610	94	74	H14	ISO 45 H	600	95	99,99500%
	610	610	118	98	H14	ISO 45 H	600	80	99,99500%
	610	762	70	50	H14	ISO 45 H	750	125	99,99500%
	610	762	94	74	H14	ISO 45 H	750	95	99,99500%
	610	762	118	98	H14	ISO 45 H	750	80	99,99500%
	610	915	70	50	H14	ISO 45 H	900	125	99,99500%
	610	915	94	74	H14	ISO 45 H	900	95	99,99500%

Alternative sizes on request

Tops Luchtfilters B.V.
Platinastraat 34
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06
E-mail info@topsluchtfilters.nl
Web www.topsluchtfilters.nl

KvK 69099456
BTW NL857733692B01
IBAN NL 21 RABO 0122 7145 71

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	610	915	118	98	H14	ISO 45 H	900	80	99,99500%
	610	1220	70	50	H14	ISO 45 H	1200	125	99,99500%
	610	1220	94	74	H14	ISO 45 H	1200	95	99,99500%
	610	1220	118	98	H14	ISO 45 H	1200	80	99,99500%
	610	1524	70	50	H14	ISO 45 H	1500	125	99,99500%
	610	1830	70	50	H14	ISO 45 H	1800	125	99,99500%
	762	762	70	50	H14	ISO 45 H	940	125	99,99500%
	762	762	94	74	H14	ISO 45 H	940	95	99,99500%
	762	915	70	50	H14	ISO 45 H	1130	125	99,99500%
	762	1220	70	50	H14	ISO 45 H	1500	125	99,99500%
	762	1524	70	50	H14	ISO 45 H	1880	125	99,99500%
	762	1830	70	50	H14	ISO 45 H	2260	125	99,99500%
	915	915	70	50	H14	ISO 45 H	1360	125	99,99500%
	915	1220	70	50	H14	ISO 45 H	1800	125	99,99500%
	915	1524	70	50	H14	ISO 45 H	2260	125	99,99500%
	915	1830	70	50	H14	ISO 45 H	2710	125	99,99500%
	1220	1220	70	50	H14	ISO 45 H	2400	125	99,99500%

Alternative sizes on request