

# Absolute filter Dry seal U15

## APPLICATIONS


- Cleanroom supply and exhaust air
- Open plenum, terminal and in-line enclosure systems and clean benches

## ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate

## SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

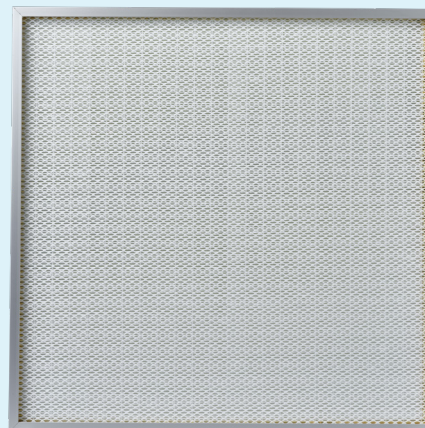

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	305	305	70	50	U15	ISO 55 U	150	145	99,99950%
	305	305	94	74	U15	ISO 55 U	150	110	99,99950%
	305	305	118	98	U15	ISO 55 U	150	85	99,99950%
	305	610	70	50	U15	ISO 55 U	300	145	99,99950%
	305	610	94	74	U15	ISO 55 U	300	110	99,99950%
	305	762	70	50	U15	ISO 55 U	380	145	99,99950%
	305	915	70	50	U15	ISO 55 U	450	145	99,99950%
	457	457	70	50	U15	ISO 55 U	340	145	99,99950%
	457	457	118	98	U15	ISO 55 U	340	85	99,99950%
	457	610	70	50	U15	ISO 55 U	450	145	99,99950%
	610	610	70	50	U15	ISO 55 U	600	145	99,99950%
	610	610	94	74	U15	ISO 55 U	600	110	99,99950%
	610	610	118	98	U15	ISO 55 U	600	85	99,99950%
	610	762	70	50	U15	ISO 55 U	750	145	99,99950%
	610	762	94	74	U15	ISO 55 U	750	110	99,99950%
	610	762	118	98	U15	ISO 55 U	750	85	99,99950%
	610	915	70	50	U15	ISO 55 U	900	145	99,99950%
	610	915	94	74	U15	ISO 55 U	900	110	99,99950%

Alternative sizes on request

Tops Luchtfilters B.V.  
Platinastraat 34  
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06  
E-mail [info@topsluchtfilters.nl](mailto:info@topsluchtfilters.nl)  
Web [www.topsluchtfilters.nl](http://www.topsluchtfilters.nl)

KvK 69099456  
BTW NL857733692B01  
IBAN NL 21 RABO 0122 7145 71

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	610	915	118	98	U15	ISO 55 U	900	85	99,99950%
	610	1220	70	50	U15	ISO 55 U	1200	145	99,99950%
	610	1220	94	74	U15	ISO 55 U	1200	110	99,99950%
	610	1220	118	98	U15	ISO 55 U	1200	85	99,99950%
	610	1524	70	50	U15	ISO 55 U	1500	145	99,99950%
	610	1830	70	50	U15	ISO 55 U	1800	145	99,99950%
	762	762	70	50	U15	ISO 55 U	940	145	99,99950%
	762	762	94	74	U15	ISO 55 U	940	110	99,99950%
	762	915	70	50	U15	ISO 55 U	1130	145	99,99950%
	762	1220	70	50	U15	ISO 55 U	1500	145	99,99950%
	762	1524	70	50	U15	ISO 55 U	1880	145	99,99950%
	762	1830	70	50	U15	ISO 55 U	2260	145	99,99950%
	915	915	70	50	U15	ISO 55 U	1360	145	99,99950%
	915	1220	70	50	U15	ISO 55 U	1800	145	99,99950%
	915	1524	70	50	U15	ISO 55 U	2260	145	99,99950%
	915	1830	70	50	U15	ISO 55 U	2710	145	99,99950%
	1220	1220	70	50	U15	ISO 55 U	2400	145	99,99950%

Alternative sizes on request