

Absolute filter

Dry seal U16

APPLICATIONS


- Cleanroom supply and exhaust air
- Open plenum, terminal and in-line enclosure systems and clean benches

ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

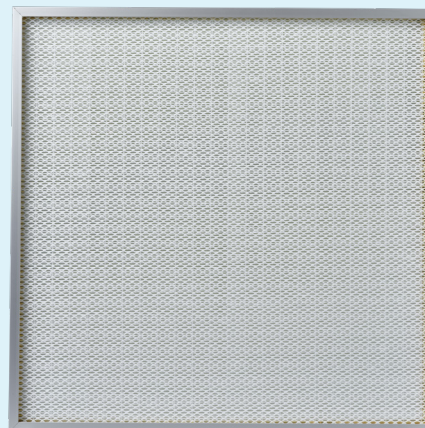

| ARTICLE NUMBER | WIDTH MM. | LENGTH MM. | THICKNESS MM. | THICKNESS PLEAT PACK MM. | EN 1822 | ISO 29463 | FLOW RATE M3/H | INITIAL RESISTANCE | EFFICIENCY |
|----------------|-----------|------------|---------------|--------------------------|---------|-----------|----------------|--------------------|------------|
| | 305 | 305 | 70 | 50 | U16 | ISO 65 U | 150 | 170 | 99,99995% |
| | 305 | 305 | 94 | 74 | U16 | ISO 65 U | 150 | 130 | 99,99995% |
| | 305 | 305 | 118 | 98 | U16 | ISO 65 U | 150 | 95 | 99,99995% |
| | 305 | 610 | 70 | 50 | U16 | ISO 65 U | 300 | 170 | 99,99995% |
| | 305 | 610 | 94 | 74 | U16 | ISO 65 U | 300 | 130 | 99,99995% |
| | 305 | 762 | 70 | 50 | U16 | ISO 65 U | 380 | 170 | 99,99995% |
| | 305 | 915 | 70 | 50 | U16 | ISO 65 U | 450 | 170 | 99,99995% |
| | 457 | 457 | 70 | 50 | U16 | ISO 65 U | 340 | 170 | 99,99995% |
| | 457 | 457 | 118 | 98 | U16 | ISO 65 U | 340 | 95 | 99,99995% |
| | 457 | 610 | 70 | 50 | U16 | ISO 65 U | 450 | 170 | 99,99995% |
| | 610 | 610 | 70 | 50 | U16 | ISO 65 U | 600 | 170 | 99,99995% |
| | 610 | 610 | 94 | 74 | U16 | ISO 65 U | 600 | 130 | 99,99995% |
| | 610 | 610 | 118 | 98 | U16 | ISO 65 U | 600 | 95 | 99,99995% |
| | 610 | 762 | 70 | 50 | U16 | ISO 65 U | 750 | 170 | 99,99995% |
| | 610 | 762 | 94 | 74 | U16 | ISO 65 U | 750 | 130 | 99,99995% |
| | 610 | 762 | 118 | 98 | U16 | ISO 65 U | 750 | 95 | 99,99995% |
| | 610 | 915 | 70 | 50 | U16 | ISO 65 U | 900 | 170 | 99,99995% |
| | 610 | 915 | 94 | 74 | U16 | ISO 65 U | 900 | 130 | 99,99995% |

Alternative sizes on request

Tops Luchtfilters B.V.
Platinastraat 34
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06
E-mail info@topsluchtfilters.nl
Web www.topsluchtfilters.nl

KvK 69099456
BTW NL857733692B01
IBAN NL 21 RABO 0122 7145 71

| ARTICLE NUMBER | WIDTH MM. | LENGTH MM. | THICKNESS MM. | THICKNESS PLEAT PACK MM. | EN 1822 | ISO 29463 | FLOW RATE M3/H | INITIAL RESISTANCE | EFFICIENCY |
|----------------|-----------|------------|---------------|--------------------------|---------|-----------|----------------|--------------------|------------|
| | 610 | 915 | 118 | 98 | U16 | ISO 65 U | 900 | 95 | 99,99995% |
| | 610 | 1220 | 70 | 50 | U16 | ISO 65 U | 1200 | 170 | 99,99995% |
| | 610 | 1220 | 94 | 74 | U16 | ISO 65 U | 1200 | 130 | 99,99995% |
| | 610 | 1220 | 118 | 98 | U16 | ISO 65 U | 1200 | 95 | 99,99995% |
| | 610 | 1524 | 70 | 50 | U16 | ISO 65 U | 1500 | 170 | 99,99995% |
| | 610 | 1830 | 70 | 50 | U16 | ISO 65 U | 1800 | 170 | 99,99995% |
| | 762 | 762 | 70 | 50 | U16 | ISO 65 U | 940 | 170 | 99,99995% |
| | 762 | 762 | 94 | 74 | U16 | ISO 65 U | 940 | 130 | 99,99995% |
| | 762 | 915 | 70 | 50 | U16 | ISO 65 U | 1130 | 170 | 99,99995% |
| | 762 | 1220 | 70 | 50 | U16 | ISO 65 U | 1500 | 170 | 99,99995% |
| | 762 | 1524 | 70 | 50 | U16 | ISO 65 U | 1880 | 170 | 99,99995% |
| | 762 | 1830 | 70 | 50 | U16 | ISO 65 U | 2260 | 170 | 99,99995% |
| | 915 | 915 | 70 | 50 | U16 | ISO 65 U | 1360 | 170 | 99,99995% |
| | 915 | 1220 | 70 | 50 | U16 | ISO 65 U | 1800 | 170 | 99,99995% |
| | 915 | 1524 | 70 | 50 | U16 | ISO 65 U | 2260 | 170 | 99,99995% |
| | 915 | 1830 | 70 | 50 | U16 | ISO 65 U | 2710 | 170 | 99,99995% |
| | 1220 | 1220 | 70 | 50 | U16 | ISO 65 U | 2400 | 170 | 99,99995% |

Alternative sizes on request