

# Absolute filter Fluidseal U15

## APPLICATIONS


- Cleanroom supply and exhaust air
- Connection hood and fan filter modules

## ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate
- Integrated groove filled with gel for perfect sealing

## SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

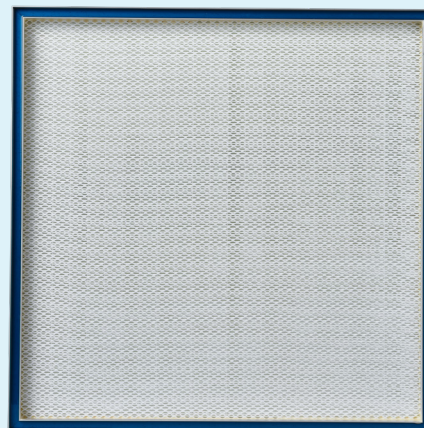

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	535	535	80	50	U15	ISO 55 U	460	145	99,99950%
	535	535	104	74	U15	ISO 55 U	460	110	99,99950%
	535	535	128	98	U15	ISO 55 U	460	85	99,99950%
	535	835	80	50	U15	ISO 55 U	725	145	99,99950%
	535	835	104	74	U15	ISO 55 U	725	110	99,99950%
	535	835	128	98	U15	ISO 55 U	725	85	99,99950%
	535	1135	80	50	U15	ISO 55 U	985	145	99,99950%
	535	1135	104	74	U15	ISO 55 U	985	110	99,99950%
	535	1135	128	98	U15	ISO 55 U	985	85	99,99950%
	610	610	80	50	U15	ISO 55 U	600	145	99,99950%
	610	610	104	74	U15	ISO 55 U	600	110	99,99950%
	610	610	128	98	U15	ISO 55 U	600	85	99,99950%
	610	915	80	50	U15	ISO 55 U	900	145	99,99950%
	610	915	104	74	U15	ISO 55 U	900	110	99,99950%
	610	915	128	98	U15	ISO 55 U	900	85	99,99950%
	610	1220	80	50	U15	ISO 55 U	1200	145	99,99950%
	610	1220	104	74	U15	ISO 55 U	1200	110	99,99950%
	610	1220	128	98	U15	ISO 55 U	1200	85	99,99950%

Alternative sizes on request

Tops Luchtfilters B.V.  
Platinastraat 34  
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06  
E-mail [info@topsluchtfilters.nl](mailto:info@topsluchtfilters.nl)  
Web [www.topsluchtfilters.nl](http://www.topsluchtfilters.nl)

KvK 69099456  
BTW NL857733692B01  
IBAN NL 21 RABO 0122 7145 71

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	1220	1220	80	50	U15	ISO 55 U	2400	145	99,99950%
	1220	1220	104	74	U15	ISO 55 U	2400	110	99,99950%
	1220	1220	128	98	U15	ISO 55 U	2400	85	99,99950%

Alternative sizes on request