

Absolute filter Fluidseal U16

APPLICATIONS


- Cleanroom supply and exhaust air
- Connection hood and fan filter modules

ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate
- Integrated groove filled with gel for perfect sealing

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

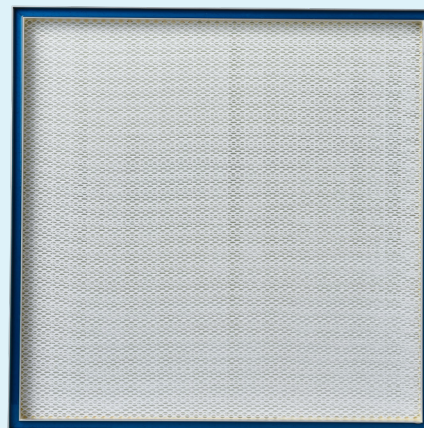

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	535	535	80	50	U16	ISO 65 U	460	170	99,99995%
	535	535	104	74	U16	ISO 65 U	460	130	99,99995%
	535	535	128	98	U16	ISO 65 U	460	95	99,99995%
	535	835	80	50	U16	ISO 65 U	725	170	99,99995%
	535	835	104	74	U16	ISO 65 U	725	130	99,99995%
	535	835	128	98	U16	ISO 65 U	725	95	99,99995%
	535	1135	80	50	U16	ISO 65 U	985	170	99,99995%
	535	1135	104	74	U16	ISO 65 U	985	130	99,99995%
	535	1135	128	98	U16	ISO 65 U	985	95	99,99995%
	610	610	80	50	U16	ISO 65 U	600	170	99,99995%
	610	610	104	74	U16	ISO 65 U	600	130	99,99995%
	610	610	128	98	U16	ISO 65 U	600	95	99,99995%
	610	915	80	50	U16	ISO 65 U	900	170	99,99995%
	610	915	104	74	U16	ISO 65 U	900	130	99,99995%
	610	915	128	98	U16	ISO 65 U	900	95	99,99995%
	610	1220	80	50	U16	ISO 65 U	1200	170	99,99995%
	610	1220	104	74	U16	ISO 65 U	1200	130	99,99995%
	610	1220	128	98	U16	ISO 65 U	1200	95	99,99995%

Alternative sizes on request

Tops Luchtfilters B.V.
Platinastraat 34
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06
E-mail info@topsluchtfilters.nl
Web www.topsluchtfilters.nl

KvK 69099456
BTW NL857733692B01
IBAN NL 21 RABO 0122 7145 71

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	1220	1220	80	50	U16	ISO 65 U	2400	170	99,99995%
	1220	1220	104	74	U16	ISO 65 U	2400	130	99,99995%
	1220	1220	128	98	U16	ISO 65 U	2400	95	99,99995%

Alternative sizes on request