

# Absolute filter Knifeedge U15

## APPLICATIONS


- Cleanroom supply and exhaust air
- Fan filter units
- Cleanroom gel ceiling

## ADVANTAGES

- A perfect seal in suspended ceiling systems with liquid channels
- High Efficiency Classification
- Easy to install and replace
- Individual scan report supplied with each filter

## SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

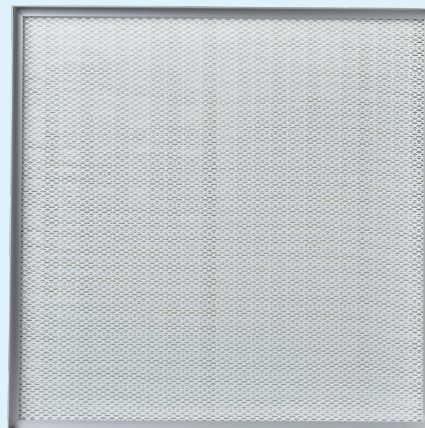

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	570	570	86	86	U15	ISO 55 U	525	145	99,99950%
	570	570	110	110	U15	ISO 55 U	525	110	99,99950%
	570	570	140	140	U15	ISO 55 U	525	85	99,99950%
	570	870	86	86	U15	ISO 55 U	805	145	99,99950%
	570	870	110	110	U15	ISO 55 U	805	110	99,99950%
	570	870	140	140	U15	ISO 55 U	805	85	99,99950%
	570	1170	86	86	U15	ISO 55 U	1080	145	99,99950%
	570	1170	110	110	U15	ISO 55 U	1080	110	99,99950%
	570	1170	140	140	U15	ISO 55 U	1080	85	99,99950%
	1170	1170	86	86	U15	ISO 55 U	2220	145	99,99950%
	1170	1170	110	110	U15	ISO 55 U	2220	110	99,99950%
	1170	1170	140	140	U15	ISO 55 U	2220	85	99,99950%

Alternative sizes on request