

Pocket filter

Fiberglass ePM1 85%

APPLICATIONS


- Fine filtration for air handling units and prefiltration for (H) EPA filters

ADVANTAGES

- The aerodynamic shape reduces turbulence in the airflow
- Tapered pockets reduce pressure drop
- Low energy consumption
- High dust-holding capacity and long service life
- Eurovent certified through the manufacturer

SPECIFICATIONS

- Media: Fiber glass
- Frame: Galvanized steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

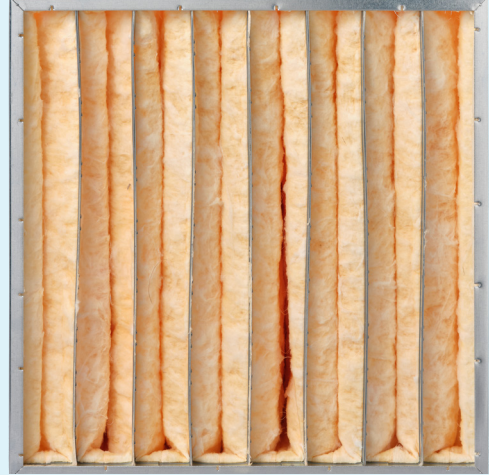

ARTICLE NUMBER	WIDTH MM.	HEIGHT MM.	HEIGHT MM.	HEIGHT MM.	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	600	4	ePM1 85%	F9	850	160	2045
	287	592	600	4	ePM1 85%	F9	1700	160	2045
	287	892	600	4	ePM1 85%	F9	2550	160	2045
	490	592	600	6	ePM1 85%	F9	2800	160	2045
	490	892	600	6	ePM1 85%	F9	4200	160	2045
	592	287	600	8	ePM1 85%	F9	1700	160	2045
	592	490	600	8	ePM1 85%	F9	2800	160	2045
	592	592	600	8	ePM1 85%	F9	3400	160	2045
	592	892	600	8	ePM1 85%	F9	5100	160	2045

Alternative sizes on request