

Pocket filter

Fiberglass ePM10 60%

APPLICATIONS


- Medium filtration for air handling units and prefiltration for (H)EPA filters

ADVANTAGES

- The aerodynamic shape reduces turbulence in the airflow
- Tapered pockets reduce pressure drop
- Low energy consumption
- High dust-holding capacity and long service life
- Eurovent certified through the manufacturer

SPECIFICATIONS

- Media: Fiber glass
- Frame: Galvanized steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

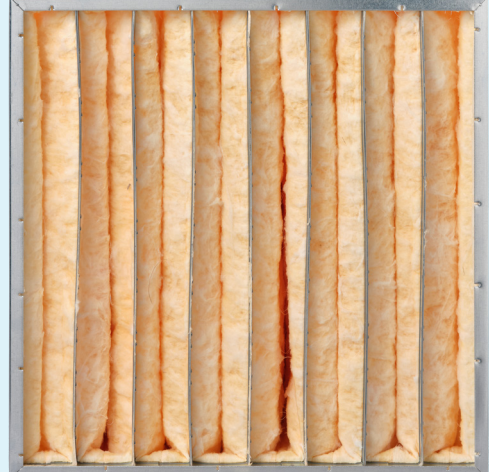

ARTICLE NUMBER	WIDTH MM.	HEIGHT MM.	LENGTH MM.	NUMBER OF POCKETS	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	360	3	ePM10 60%	M5	850	80	
	287	592	360	3	ePM10 60%	M5	1700	80	
	287	892	360	3	ePM10 60%	M5	2550	80	
	490	592	360	5	ePM10 60%	M5	2800	80	
	490	892	360	5	ePM10 60%	M5	4200	80	
	592	287	360	6	ePM10 60%	M5	1700	80	
	592	490	360	6	ePM10 60%	M5	2800	80	
	592	592	360	6	ePM10 60%	M5	3400	80	
	592	892	360	6	ePM10 60%	M5	5100	80	

Alternative sizes on request

ARTICLE NUMBER	WIDTH MM.	HEIGHT MM.	LENGTH MM.	NUMBER OF POCKETS	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	500	3	ePM10 60%	M5	850		
	287	592	500	3	ePM10 60%	M5	1700		
	287	892	500	3	ePM10 60%	M5	2550		
	490	592	500	5	ePM10 60%	M5	2800		
	490	892	500	5	ePM10 60%	M5	4200		
	592	287	500	6	ePM10 60%	M5	1700		
	592	490	500	6	ePM10 60%	M5	2800		
	592	592	500	6	ePM10 60%	M5	3400		
	592	892	500	6	ePM10 60%	M5	5100		
	287	287	600	3	ePM10 60%	M5	850	43	635
	287	592	600	3	ePM10 60%	M5	1700	43	635
	287	892	600	3	ePM10 60%	M5	2550	43	635
	490	592	600	5	ePM10 60%	M5	2800	43	635
	490	892	600	5	ePM10 60%	M5	4200	43	635
	592	287	600	6	ePM10 60%	M5	1700	43	635
	592	490	600	6	ePM10 60%	M5	2800	43	635
01030039	592	592	600	6	ePM10 60%	M5	3400	43	635
	592	892	600	6	ePM10 60%	M5	5100	43	635

Alternative sizes on request