

Pocket filter

Fiberglass ePM2,5 50%

APPLICATIONS


- Medium filtration for air handling units and prefiltration for (H)EPA filters

ADVANTAGES

- The aerodynamic shape reduces turbulence in the airflow
- Tapered pockets reduce pressure drop
- Low energy consumption
- High dust-holding capacity and long service life
- Eurovent certified through the manufacturer

SPECIFICATIONS

- Media: Fiber glass
- Frame: Galvanized steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

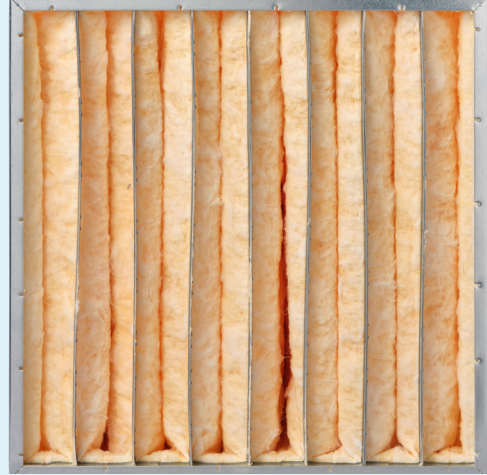

ARTICLE NUMBER	WIDTH MM.	HEIGHT MM.	LENGTH MM.	NUMBER OF POCKETS	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	360	4	ePM2,5 50%	M6	850	100	
	287	592	360	4	ePM2,5 50%	M6	1700	100	
	287	892	360	4	ePM2,5 50%	M6	2550	100	
	490	592	360	6	ePM2,5 50%	M6	2800	100	
	490	892	360	6	ePM2,5 50%	M6	4200	100	
	592	287	360	8	ePM2,5 50%	M6	1700	100	
	592	490	360	8	ePM2,5 50%	M6	2800	100	
	592	592	360	8	ePM2,5 50%	M6	3400	100	
	592	892	360	8	ePM2,5 50%	M6	5100	100	

Alternative sizes on request

ARTICLE NUMBER	WIDTH MM.	HEIGHT MM.	LENGTH MM.	NUMBER OF POCKETS	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	500	4	ePM2,5 50%	M6	850	75	1017
	287	592	500	4	ePM2,5 50%	M6	1700	75	1017
	287	892	500	4	ePM2,5 50%	M6	2550	75	1017
	490	592	500	6	ePM2,5 50%	M6	2800	75	1017
	490	892	500	6	ePM2,5 50%	M6	4200	75	1017
	592	287	500	8	ePM2,5 50%	M6	1700	75	1017
	592	490	500	8	ePM2,5 50%	M6	2800	75	1017
	592	592	500	8	ePM2,5 50%	M6	3400	75	1017
	592	892	500	8	ePM2,5 50%	M6	5100	75	1017
	287	287	600	4	ePM2,5 50%	M6	850	58	768
	287	592	600	4	ePM2,5 50%	M6	1700	58	768
	287	892	600	4	ePM2,5 50%	M6	2550	58	768
	490	592	600	6	ePM2,5 50%	M6	2800	58	768
	490	892	600	6	ePM2,5 50%	M6	4200	58	768
	592	287	600	8	ePM2,5 50%	M6	1700	58	768
	592	490	600	8	ePM2,5 50%	M6	2800	58	768
	592	592	600	8	ePM2,5 50%	M6	3400	58	768
	592	892	600	8	ePM2,5 50%	M6	5100	58	768

Alternative sizes on request