

Pocket filter

Synthetic ePM1 70%

APPLICATIONS


- Fine filtration for air handling units and prefiltration for (H) EPA filters

ADVANTAGES

- High dust-holding capacity
- Low pressure drop
- Conical self-supporting bags
- Applicable within the food industry
- Eurovent certified through the manufacturer

SPECIFICATIONS

- Media: Synthetic with progressive build-up
- Frame: Galvanized steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 80° Celsius
- Maximum relative humidity: 100%

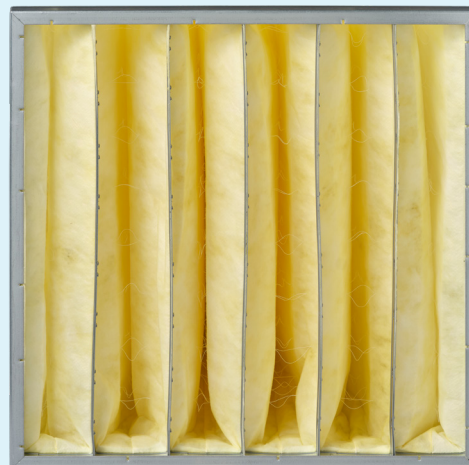

ARTICLE NUMBER	WIDTH MM.	HEIGHT MM.	LENGTH MM.	NUMBER OF POCKETS	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	360	4	ePM1 70%	F8	500		
	287	592	360	4	ePM1 70%	F8	1000		
	287	892	360	3	ePM1 70%	F8	1500		
	490	592	360	6	ePM1 70%	F8	1665		
	490	892	360	5	ePM1 70%	F8	2470		
	592	287	360	8	ePM1 70%	F8	1000		
	592	490	360	8	ePM1 70%	F8	1665		
	592	592	360	8	ePM1 70%	F8	2000		
	592	892	360	8	ePM1 70%	F8	3000		

Alternative sizes on request

ARTICLE NUMBER	WIDTH MM.	HEIGHT MM.	LENGTH MM.	NUMBER OF POCKETS	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	500	4	ePM1 70%	F8	500	106	>2150
	287	592	500	4	ePM1 70%	F8	1000	106	>2150
	287	892	500	3	ePM1 70%	F8	1500	106	>2150
	490	592	500	6	ePM1 70%	F8	1665	106	>2150
	490	892	500	5	ePM1 70%	F8	2470	106	>2150
	592	287	500	8	ePM1 70%	F8	1000	106	>2150
	592	490	500	8	ePM1 70%	F8	1665	106	>2150
	592	592	500	8	ePM1 70%	F8	2000	106	>2150
	592	892	500	8	ePM1 70%	F8	3000	106	>2150
	287	287	600	4	ePM1 70%	F8	500	86	>2150
	287	592	600	4	ePM1 70%	F8	1000	86	>2150
	287	892	600	3	ePM1 70%	F8	1500	86	>2150
	490	592	600	6	ePM1 70%	F8	1665	86	>2150
	490	892	600	5	ePM1 70%	F8	2470	86	>2150
	592	287	600	8	ePM1 70%	F8	1000	86	>2150
	592	490	600	8	ePM1 70%	F8	1665	86	>2150
01011318	592	592	600	8	ePM1 70%	F8	2000	86	>2150
	592	892	600	8	ePM1 70%	F8	3000	86	>2150

Alternative sizes on request