

Absolute filter

Dry seal U15

APPLICATIONS


- Cleanroom supply and exhaust air
- Open plenum, terminal and in-line enclosure systems and clean benches

ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

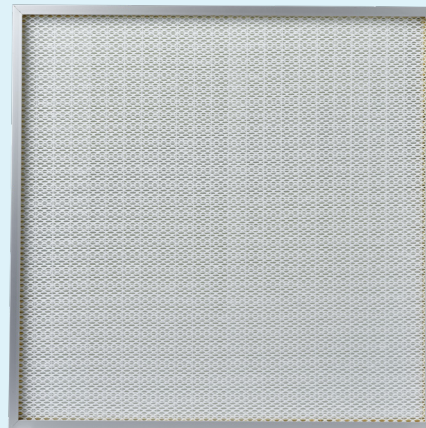

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	305	305	70	50	U15	ISO 55 U	150	145	99,99950%
	305	305	94	74	U15	ISO 55 U	150	110	99,99950%
	305	305	118	98	U15	ISO 55 U	150	85	99,99950%
	305	610	70	50	U15	ISO 55 U	300	145	99,99950%
	305	610	94	74	U15	ISO 55 U	300	110	99,99950%
	305	762	70	50	U15	ISO 55 U	380	145	99,99950%
	305	915	70	50	U15	ISO 55 U	450	145	99,99950%
	457	457	70	50	U15	ISO 55 U	340	145	99,99950%
	457	457	118	98	U15	ISO 55 U	340	85	99,99950%
	457	610	70	50	U15	ISO 55 U	450	145	99,99950%
	610	610	70	50	U15	ISO 55 U	600	145	99,99950%
	610	610	94	74	U15	ISO 55 U	600	110	99,99950%
	610	610	118	98	U15	ISO 55 U	600	85	99,99950%
	610	762	70	50	U15	ISO 55 U	750	145	99,99950%
	610	762	94	74	U15	ISO 55 U	750	110	99,99950%
	610	762	118	98	U15	ISO 55 U	750	85	99,99950%
	610	915	70	50	U15	ISO 55 U	900	145	99,99950%
	610	915	94	74	U15	ISO 55 U	900	110	99,99950%

Alternative sizes on request

Tops Luchtfilters B.V.
Platinastraat 34
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06
E-mail info@topsluchtfilters.nl
Web www.topsluchtfilters.nl

KvK 69099456
BTW NL857733692B01
IBAN NL 21 RABO 0122 7145 71

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	610	915	118	98	U15	ISO 55 U	900	85	99,99950%
	610	1220	70	50	U15	ISO 55 U	1200	145	99,99950%
	610	1220	94	74	U15	ISO 55 U	1200	110	99,99950%
	610	1220	118	98	U15	ISO 55 U	1200	85	99,99950%
	610	1524	70	50	U15	ISO 55 U	1500	145	99,99950%
	610	1830	70	50	U15	ISO 55 U	1800	145	99,99950%
	762	762	70	50	U15	ISO 55 U	940	145	99,99950%
	762	762	94	74	U15	ISO 55 U	940	110	99,99950%
	762	915	70	50	U15	ISO 55 U	1130	145	99,99950%
	762	1220	70	50	U15	ISO 55 U	1500	145	99,99950%
	762	1524	70	50	U15	ISO 55 U	1880	145	99,99950%
	762	1830	70	50	U15	ISO 55 U	2260	145	99,99950%
	915	915	70	50	U15	ISO 55 U	1360	145	99,99950%
	915	1220	70	50	U15	ISO 55 U	1800	145	99,99950%
	915	1524	70	50	U15	ISO 55 U	2260	145	99,99950%
	915	1830	70	50	U15	ISO 55 U	2710	145	99,99950%
	1220	1220	70	50	U15	ISO 55 U	2400	145	99,99950%

Alternative sizes on request

Absolute filter

Dry seal U16

APPLICATIONS


- Cleanroom supply and exhaust air
- Open plenum, terminal and in-line enclosure systems and clean benches

ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

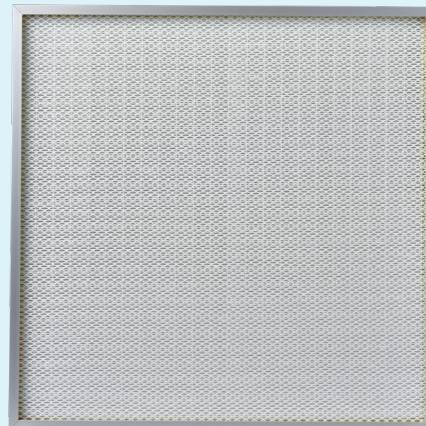

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	305	305	70	50	U16	ISO 65 U	150	170	99,99995%
	305	305	94	74	U16	ISO 65 U	150	130	99,99995%
	305	305	118	98	U16	ISO 65 U	150	95	99,99995%
	305	610	70	50	U16	ISO 65 U	300	170	99,99995%
	305	610	94	74	U16	ISO 65 U	300	130	99,99995%
	305	762	70	50	U16	ISO 65 U	380	170	99,99995%
	305	915	70	50	U16	ISO 65 U	450	170	99,99995%
	457	457	70	50	U16	ISO 65 U	340	170	99,99995%
	457	457	118	98	U16	ISO 65 U	340	95	99,99995%
	457	610	70	50	U16	ISO 65 U	450	170	99,99995%
	610	610	70	50	U16	ISO 65 U	600	170	99,99995%
	610	610	94	74	U16	ISO 65 U	600	130	99,99995%
	610	610	118	98	U16	ISO 65 U	600	95	99,99995%
	610	762	70	50	U16	ISO 65 U	750	170	99,99995%
	610	762	94	74	U16	ISO 65 U	750	130	99,99995%
	610	762	118	98	U16	ISO 65 U	750	95	99,99995%
	610	915	70	50	U16	ISO 65 U	900	170	99,99995%
	610	915	94	74	U16	ISO 65 U	900	130	99,99995%

Alternative sizes on request

Tops Luchtfilters B.V.
Platinastraat 34
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06
E-mail info@topsluchtfilters.nl
Web www.topsluchtfilters.nl

KvK 69099456
BTW NL857733692B01
IBAN NL 21 RABO 0122 7145 71

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	610	915	118	98	U16	ISO 65 U	900	95	99,99995%
	610	1220	70	50	U16	ISO 65 U	1200	170	99,99995%
	610	1220	94	74	U16	ISO 65 U	1200	130	99,99995%
	610	1220	118	98	U16	ISO 65 U	1200	95	99,99995%
	610	1524	70	50	U16	ISO 65 U	1500	170	99,99995%
	610	1830	70	50	U16	ISO 65 U	1800	170	99,99995%
	762	762	70	50	U16	ISO 65 U	940	170	99,99995%
	762	762	94	74	U16	ISO 65 U	940	130	99,99995%
	762	915	70	50	U16	ISO 65 U	1130	170	99,99995%
	762	1220	70	50	U16	ISO 65 U	1500	170	99,99995%
	762	1524	70	50	U16	ISO 65 U	1880	170	99,99995%
	762	1830	70	50	U16	ISO 65 U	2260	170	99,99995%
	915	915	70	50	U16	ISO 65 U	1360	170	99,99995%
	915	1220	70	50	U16	ISO 65 U	1800	170	99,99995%
	915	1524	70	50	U16	ISO 65 U	2260	170	99,99995%
	915	1830	70	50	U16	ISO 65 U	2710	170	99,99995%
	1220	1220	70	50	U16	ISO 65 U	2400	170	99,99995%

Alternative sizes on request

Absolute filter Knifeedge U15

APPLICATIONS


- Cleanroom supply and exhaust air
- Fan filter units
- Cleanroom gel ceiling

ADVANTAGES

- A perfect seal in suspended ceiling systems with liquid channels
- High Efficiency Classification
- Easy to install and replace
- Individual scan report supplied with each filter

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

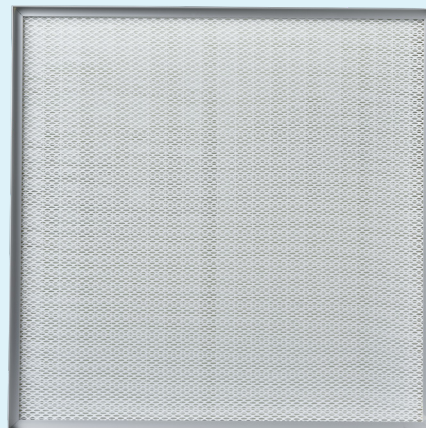

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	570	570	86	86	U15	ISO 55 U	525	145	99,99950%
	570	570	110	110	U15	ISO 55 U	525	110	99,99950%
	570	570	140	140	U15	ISO 55 U	525	85	99,99950%
	570	870	86	86	U15	ISO 55 U	805	145	99,99950%
	570	870	110	110	U15	ISO 55 U	805	110	99,99950%
	570	870	140	140	U15	ISO 55 U	805	85	99,99950%
	570	1170	86	86	U15	ISO 55 U	1080	145	99,99950%
	570	1170	110	110	U15	ISO 55 U	1080	110	99,99950%
	570	1170	140	140	U15	ISO 55 U	1080	85	99,99950%
	1170	1170	86	86	U15	ISO 55 U	2220	145	99,99950%
	1170	1170	110	110	U15	ISO 55 U	2220	110	99,99950%
	1170	1170	140	140	U15	ISO 55 U	2220	85	99,99950%

Alternative sizes on request

Absolute filter Knifeedge U16

APPLICATIONS


- Cleanroom supply and exhaust air
- Fan filter units
- Cleanroom gel ceiling

ADVANTAGES

- A perfect seal in suspended ceiling systems with liquid channels
- High Efficiency Classification
- Easy to install and replace
- Individual scan report supplied with each filter

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

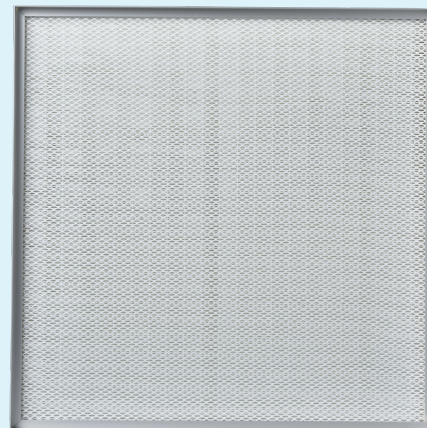

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	570	570	86	86	U16	ISO 65 U	525	170	99,99995%
	570	570	110	110	U16	ISO 65 U	525	130	99,99995%
	570	570	140	140	U16	ISO 65 U	525	95	99,99995%
	570	870	86	86	U16	ISO 65 U	805	170	99,99995%
	570	870	110	110	U16	ISO 65 U	805	130	99,99995%
	570	870	140	140	U16	ISO 65 U	805	95	99,99995%
	570	1170	86	86	U16	ISO 65 U	1080	170	99,99995%
	570	1170	110	110	U16	ISO 65 U	1080	130	99,99995%
	570	1170	140	140	U16	ISO 65 U	1080	95	99,99995%
	1170	1170	86	86	U16	ISO 65 U	2220	170	99,99995%
	1170	1170	110	110	U16	ISO 65 U	2220	130	99,99995%
	1170	1170	140	140	U16	ISO 65 U	2220	95	99,99995%

Alternative sizes on request

Absolute filter Fluidseal U15

APPLICATIONS


- Cleanroom supply and exhaust air
- Connection hood and fan filter modules

ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate
- Integrated groove filled with gel for perfect sealing

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

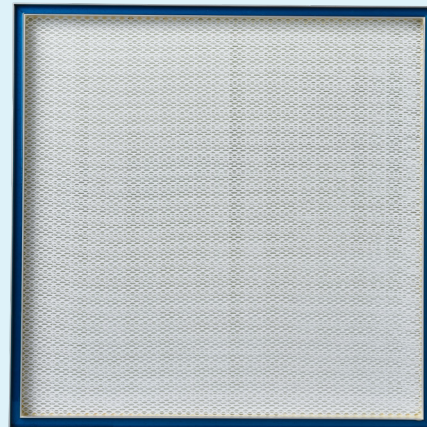

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	535	535	80	50	U15	ISO 55 U	460	145	99,99950%
	535	535	104	74	U15	ISO 55 U	460	110	99,99950%
	535	535	128	98	U15	ISO 55 U	460	85	99,99950%
	535	835	80	50	U15	ISO 55 U	725	145	99,99950%
	535	835	104	74	U15	ISO 55 U	725	110	99,99950%
	535	835	128	98	U15	ISO 55 U	725	85	99,99950%
	535	1135	80	50	U15	ISO 55 U	985	145	99,99950%
	535	1135	104	74	U15	ISO 55 U	985	110	99,99950%
	535	1135	128	98	U15	ISO 55 U	985	85	99,99950%
	610	610	80	50	U15	ISO 55 U	600	145	99,99950%
	610	610	104	74	U15	ISO 55 U	600	110	99,99950%
	610	610	128	98	U15	ISO 55 U	600	85	99,99950%
	610	915	80	50	U15	ISO 55 U	900	145	99,99950%
	610	915	104	74	U15	ISO 55 U	900	110	99,99950%
	610	915	128	98	U15	ISO 55 U	900	85	99,99950%
	610	1220	80	50	U15	ISO 55 U	1200	145	99,99950%
	610	1220	104	74	U15	ISO 55 U	1200	110	99,99950%
	610	1220	128	98	U15	ISO 55 U	1200	85	99,99950%

Alternative sizes on request

Tops Luchtfilters B.V.
Platinastraat 34
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06
E-mail info@topsluchtfilters.nl
Web www.topsluchtfilters.nl

KvK 69099456
BTW NL857733692B01
IBAN NL 21 RABO 0122 7145 71

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	1220	1220	80	50	U15	ISO 55 U	2400	145	99,99950%
	1220	1220	104	74	U15	ISO 55 U	2400	110	99,99950%
	1220	1220	128	98	U15	ISO 55 U	2400	85	99,99950%

Alternative sizes on request

Absolute filter Fluidseal U16

APPLICATIONS


- Cleanroom supply and exhaust air
- Connection hood and fan filter modules

ADVANTAGES

- Compact and lightweight
- Easy to install and replace
- Each filter is leak tested and supplied with individual test certificate
- Integrated groove filled with gel for perfect sealing

SPECIFICATIONS

- Media: Water resistant micro fiberglass
- Frame: Extruded Anodized Aluminum
- Recommended final resistance: 500 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

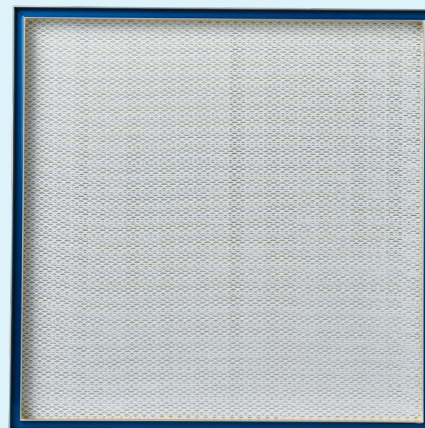

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	535	535	80	50	U16	ISO 65 U	460	170	99,99995%
	535	535	104	74	U16	ISO 65 U	460	130	99,99995%
	535	535	128	98	U16	ISO 65 U	460	95	99,99995%
	535	835	80	50	U16	ISO 65 U	725	170	99,99995%
	535	835	104	74	U16	ISO 65 U	725	130	99,99995%
	535	835	128	98	U16	ISO 65 U	725	95	99,99995%
	535	1135	80	50	U16	ISO 65 U	985	170	99,99995%
	535	1135	104	74	U16	ISO 65 U	985	130	99,99995%
	535	1135	128	98	U16	ISO 65 U	985	95	99,99995%
	610	610	80	50	U16	ISO 65 U	600	170	99,99995%
	610	610	104	74	U16	ISO 65 U	600	130	99,99995%
	610	610	128	98	U16	ISO 65 U	600	95	99,99995%
	610	915	80	50	U16	ISO 65 U	900	170	99,99995%
	610	915	104	74	U16	ISO 65 U	900	130	99,99995%
	610	915	128	98	U16	ISO 65 U	900	95	99,99995%
	610	1220	80	50	U16	ISO 65 U	1200	170	99,99995%
	610	1220	104	74	U16	ISO 65 U	1200	130	99,99995%
	610	1220	128	98	U16	ISO 65 U	1200	95	99,99995%

Alternative sizes on request

Tops Luchtfilters B.V.
Platinastraat 34
6031 TW Nederweert

Tel +31 (0)40 - 204 54 06
E-mail info@topsluchtfilters.nl
Web www.topsluchtfilters.nl

KvK 69099456
BTW NL857733692B01
IBAN NL 21 RABO 0122 7145 71

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	THICKNESS PLEAT PACK MM.	EN 1822	ISO 29463	FLOW RATE M3/H	INITIAL RESISTANCE	EFFICIENCY
	1220	1220	80	50	U16	ISO 65 U	2400	170	99,99995%
	1220	1220	104	74	U16	ISO 65 U	2400	130	99,99995%
	1220	1220	128	98	U16	ISO 65 U	2400	95	99,99995%

Alternative sizes on request